

Emergency Breakglass Triple Pole KK-BGTPRG

Triple pole resettable breakglass with adjustable sounder and bi-coloured LED's. Surface mount with cover.

FEATURES


- Triple Pole.
- Resettable.
- Power 12 / 24 Vdc.
- Protective Cover Supplied as Standart.
- Single Gang.
- Adjustable LED'S
- Surface Mount.



SPECIFICATION

- Contact Load 125V/3A.
- Dual Colour Indicator.
- Aktive Current 75 mA
- Standby Current 41mA.
- Dimension : 85mm x 85 mm x 60 mm.

STRUCTURE DIAGRAM

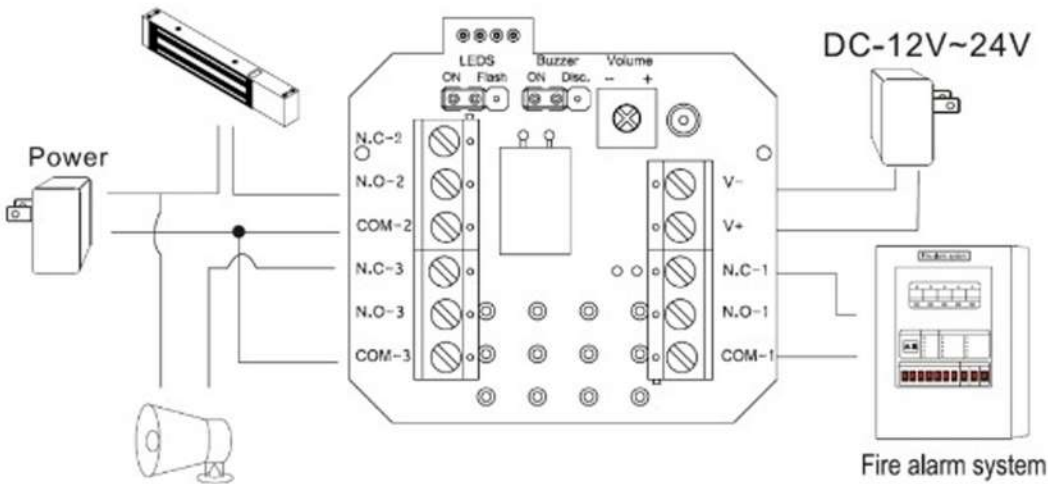

* Design & dimension subject to change without prior notice, please contact us for further information.